SUA761PU

DesignerSeries™ Universal Ultra Slim Articulating Wall Mount for 37" to 65" Ultra-Thin Displays*

* Designed for use with displays that are less than 3" (76mm) deep

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SUA761PU	24.37" x 16.94" x 1.85"-24.85" (619 x 430 x 47-631mm)	16.90lb (7.67kg)	80lb (36kg)	Scratch resistant fused epoxy	Gloss black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
SUA761PU	41.00" x 4.00" x 23.75" 1041 x 102 x 603mm	23.0lb (10.4kg)	735029306399	Wall mount, wall and display installation hardware, installation instructions	1

Accessories

ACC925: Security Fasteners


IBA2(AC)(-W), IBA3(AC)(-W): Recessed Cable Management and Power Storage Accessory Box

IBA4-W: Easy Mount Recessed Low Voltage Cable Plate


IBA5-W: Recessed Low Voltage Media Plate with Duplex Surge Suppressor


ESHV models: AV Wall Shelves
WSP756: Metal Stud Wall Plate

All dimensions = inch (mm)

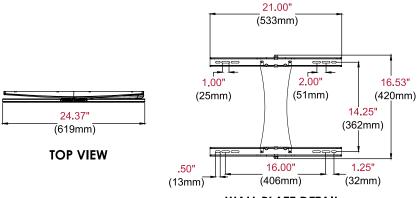

WALL PLATE DETAIL

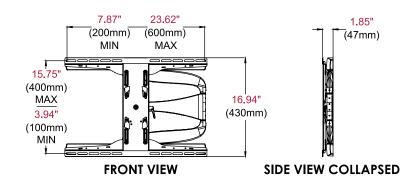



SIDE VIEW EXTENDED +15°/-5° TILT

Architect Specifications

The DesignerSeries TM Universal Ultra Slim Articulating Wall Mount shall be a Peerless-AV model SUA761PU and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV

2300 White Oak Circle Aurora, IL 60502 USA

(800) 865-2112 (630) 375-5100 Fax: (800) 359-6500

Peerless-AV Europe

Unit 3 Watford Interchange Colonial Way, Watford Herts, WD24 4WP United Kingdom

+44 (0) 1923 200100 Fax: +44 (0) 1923 200101

Peerless-AV de México

Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050

+52 (81) 8384-8300 Fax: +52 (81) 8384-8360

