



# BE Safety screen manual

It's recommended to install the BE Safety Screen with 2 people.

## 1 Parts




Safety Screen



Clamps

Number of clamps depends on BE Safety screen shape:

- U Shape (4 pcs)
- Back panel (4 pcs)
- Side panel (2 pcs)




Allen key



### Attention

*In case of an U shape or Back panel: be careful with unfolding the BE Safety screen. There is a folding line in the middle of the back panel. This line is much thinner and excessive bending could damage the product.*




## 2 Attach clamps to the BE Safety screen




1

For each clamp there is a cutout located at the bottom of the BE Safety screen.



2

Slide the clamp in the cutout so the bottom of the clamp equalizes the bottom of the screen.




3

Tighten the screw of the clamp by using the allen key, so the clamps are firmly attached to the BE Safety screen.

*Make sure the clamp is snugly positioned in the cutout of the BE Safety screen, otherwise the BE Safety screen will not align seamlessly to your desk.*



### Attention




1

Make sure the open side of the clamp is facing inwards towards the desk.



2

The side which includes the BakkerElkhuizen logo is the inner side of the BE Safety screen.



3

The side with the additional material around the windows is the outer side of the BE Safety screen.

### 3 Attach BE Safety screen to the desk

1

Unfold the BE Safety screen and make sure the open side of the clamps is facing inwards towards the desk.

2



In the centre of the back panel there is a brush panel for cable management, monitor arms etc. You can bend the brush panel outwards on the places where it's needed.

3

Attach the BE Safety screen directly to the tabletop.

4

Tighten the clamp screw to the tabletop. This ensures the BE Safety screen is secured and stable.

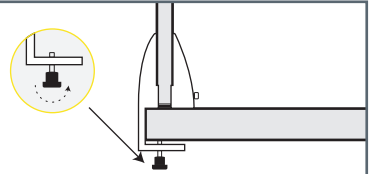

### 4 Remove protective film (only when PET-G windows are included)

1

Remove the protective film of the PET-G windows. You can pull out and insert the windows in their sockets.



#### Attention

*Make sure the film is removed on both sides of the PET-G windows.*