


# Product Specification

## Product Feature



- ✧ Front USB port
- ✧ Front physical key
- ✧ Bottom loudspeaker
- ✧ 4K ultra HD display
- ✧ IR (Infrared Ray) touch technology
- ✧ AG tempered glass 4mm Mohs level 7
- ✧ Compatible with detachable PC module
- ✧ 4K UI
- ✧ 4K HDMI OUT
- ✧ 4K Annotation at any channel
- ✧ USB 3.0 Auto switch to PC
- ✧ Front USB 2.0 Auto switch to current channel
- ✧ Gigabit LAN Auto switch to PC
- ✧ Low parallax, 1 mm air gap

## Dimension

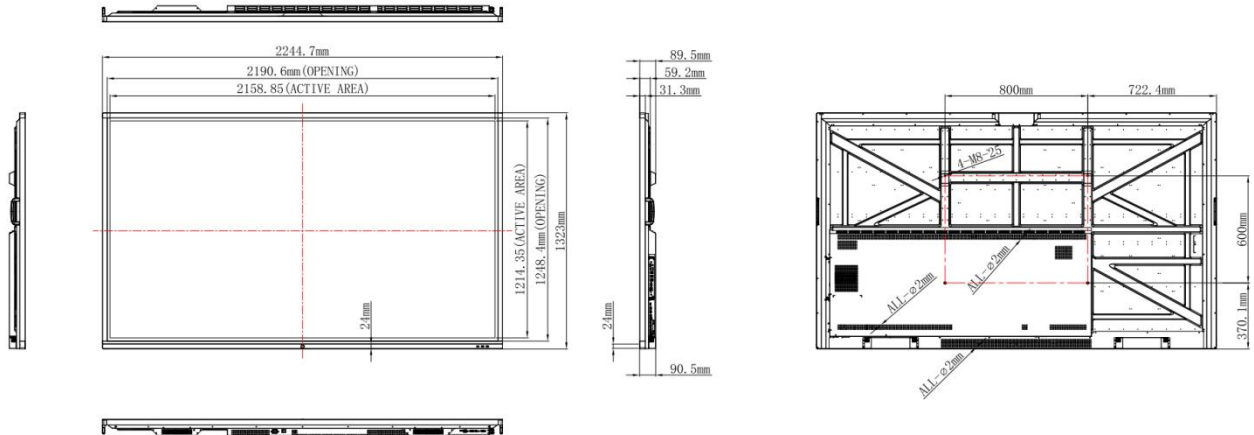

## Display

Size	98inch
Response Time	8ms
Aspect Ratio	16:9
Display Area	2158.848(H)×1214.352(V)mm
Resolution	3840(H)×2160(V)
Pixel Pitch	0.5622×0.5622mm
Refreshing Frequency	120Hz
Display Color	1.07B(10bit)
Contrast Ratio	1200:1
Viewing Angle	178°(H/V)
Back Light Unit	DLED
Brightness with glass (typ)	350 cd/m <sup>2</sup>
Brightness with glass (min)	300 cd/m <sup>2</sup>
Life Time	30000 Hours

## Video/Audio

Sound Channel	2.0
Output Power	2×12W

## I/O port

HDMI IN	3
HDMI OUT	1

USB 2.0	3(including 2 USB ports in front)
USB 3.0	3
TOUCH OUT	2
VGA IN	1
AUDIO IN	1
AUDIO OUT	1
SPDIF	1
LAN(RJ45)	1
RS232	1

## Touch System

Sensing Type	Infrared recognition
System	Windows10/Windows8/Windows7/Windows XP /Linux/Mac/Android/Chrome
Touch point	20 points touch
Touch Tool	Finger,Passive infrared pen
Minimum object size	2mm
Response Time	≤12ms
Accuracy	1mm
Writing Height	3.5mm
Writing double colors with double pens simultaneously	support
Touch Drive	Free drive
Surface Hardness	Toughened Glass with Level 7 of Mohs Standard
Interpolation Resolution	32768(W)×32768(D)

## Android System

System Version	Android 8.0
CPU	Dual core A73+Dual core A53
GPU	Quad core Mali G51
RAM	3GB
ROM	16GB

## Power

Power Requirements	100-240V~ 50/60Hz 6A
Overall Power	600W
Standby Power	≤0.5W

## Physical Specifications

Key Location & Number	Front physical key, 1
Dimension L×H×D	2244.7×1323×90.5mm
Dimension(package) L×W×H	2483×376×1493mm
Thickness of machine and wall mount	120.5mm (WIB9060G)
Wall-hanging Screw Spec	M8×25mm
VESA	800×600mm
Net Weight	101.5kg
Gross Weight	138.75kg

## Environmental Conditions

Operation Temperature	0°C- 40°C
Operation Humidity	10% - 90%RH
Storage Temperature	-20°C - 60°C
Storage Humidity	10% - 90%RH
Altitude	Below 5000 meters

## Accessories

Power Cord(European/American/British standard optional)	×1 (3 meters)
USB Touch Cable (Type A-B)	×1 (5 meters)
HDMI Cable	×1 (3 meters)
Writing Pen	×2
Remote Control	×1
Battery	×2 (AAA)

## Attached File

Quick Start Guide	×1
-------------------	----

## Compatible with PC module (optional)

Model

MT21/MT43A

## Statement

The product pictures of this specification only indicate that there may be slight difference in product effects (included but not limited to appearance, color and size). Please refer to the product.

Due to the influence of product configuration and manufacturing process, the actual size/weight of the fuselage may differ.

In order to provide accurate specification parameters and product characteristics as much as possible, it is possible to adjust and revise the text description and picture effect of this specification in real time, so as to match the actual product performance, specifications and other information.

No special notice will be given if necessary.