



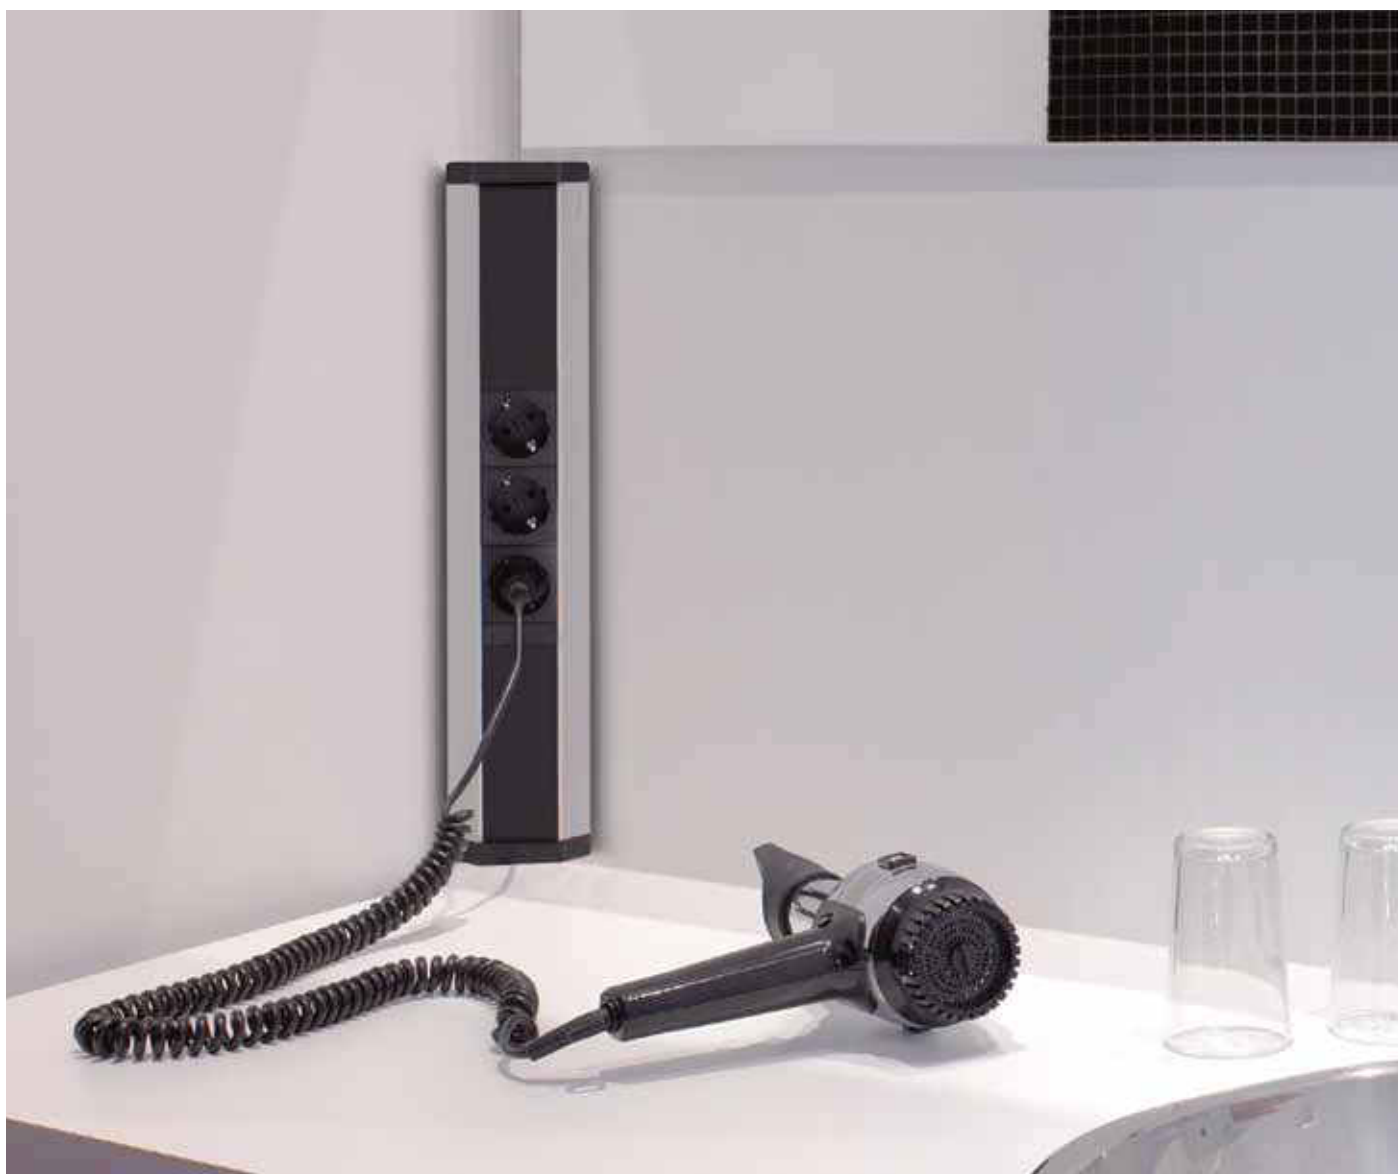
EV0line® V-Dock





Convenient.

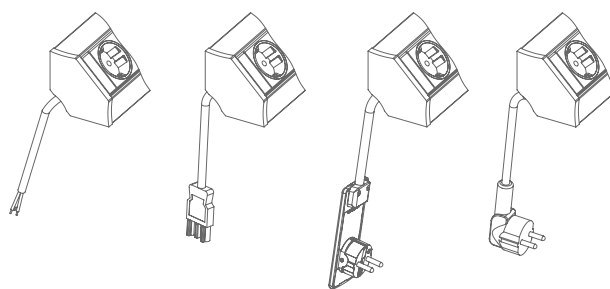
EV0line® V-Dock

With EV0line V-Dock dead corners are put to work. V-Dock can be installed horizontally or vertically and is variable in length. As additional benefit, the supply cable is concealed using the space between the back of the profile and the wall corner. Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.



Dimensions in mm

Description	Picture	Specification	Order number
<p>EVoline V-Dock CUISINE Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p> <p>With profile bracket 100 mm.</p>		silver anodised	1593 6000 1300
<p>EVoline V-Dock DATA SMALL Aluminium housing, three sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected.</p> <p>With two profile brackets 100 mm.</p>		silver anodised	1593 6000 2300



Become a co-designer and configure your very own EVoline V-Dock. Select from various finishes and modules for power, data, multimedia and safety.

Directly to
 EVoline
 Configurator.
[www.evoline.com/
 konfigurator](http://www.evoline.com/konfigurator)

