



# INDOOR DIGITAL SIGNAGE

## GENERAL LED DISPLAY

CLASS

MODEL

46"

D46AR

### KEY FEATURES

- LED BLU, Slim Design
- Power Consumption Reduced at 40% Compared to Normal Display
- Built in Video Wall Function
- Portrait / Landscape Orientation
- High Connectivity
- Remote Control (RS232)



## Broadcast your branding with Hyundai Digital Signage!

Thanks to the advanced product design, Hyundai Digital Signage Display meets requirements for various digital signage solutions.

Not only take advantage from slim and simple design, but also think more about our future environment, saving energy up to 40 percent. LED technologies bring more than just expected.



## SPECIFICATIONS

Model	D46AR	
Panel	Screen Size (diagonal)	46"
	Active Display Area (inch/mm)	40.08 x 22.55 / 1018.08 x 572.67
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	1.07 B
	Brightness (cd/m <sup>2</sup> ; typ.)	430
	Contrast Ratio	4000:1
	Response Time (ms; GTG)	8
	Viewing Angle	178°/178°
	Lifetime (hours)	50,000
	Backlight type	LED
Resolution	Monitor	1920 x 1080
	DTV	1080p
Connectivity	Input	1x DVI   1x HDMI   1x VGA(D-Sub)   1x PC Audio   1x RS232C
	Output	1x DVI   1x RS232C   Speaker (Ready)
Power	Input Voltage	100 – 240V AC
	Power consumption	110 W
Features	PIR Sensor (Motion detection)	option
	Auto Cooling System	no
	Auto Power Control	yes
	Auto Brightness Sensor	no
Operation	Temperature (°C)	0 - 40
	Humidity (%)	20 - 80
	OSD Language	10 Lang
Dimension	Set (W x H x D), inch/mm	41.41 x 23.86 x 1.59 / 1051.7 x 606.1 x 40.4
Bezel Size (U/D/L/R), inch   mm		0.59/0.59/0.59/0.59   15.1/15.1/15.1/15.1
Wall Mounting (WxH), mm		400 x 400
Weight	Set (lb/kg)	37.48 / 17

## FEATURES

### LED Backlight

HYUNDAI's public displays with LED backlight bring the advantage of up to 40% lower power consumption, compared to displays with CCFL backlight.

### Easy operating OSD menu, Remote control


In order to setup a multi display wall, the single units are linked by a daisy chain connection over DVI interface. The configuration of each display can be easily set-up over the on-screen menu or the RS232C interface.

### Slim Design

These products enable the slim design.

## DIMENSIONS

D46AR [unit: mm]

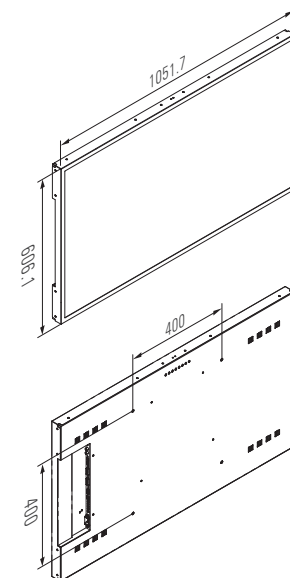

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE: NOV. 2012

#### HEAD OFFICE - HYUNDAI IBT CO., LTD.

106, Apogongdan-gil, Gimche on-si, Gyeongsangbuk-do, 740-862 The Republic of Korea  
Tel. +82 54 430 6426 E-mail: prio123@hyundaiibt.com  
www.hyundaiibt.com

#### HYUNDAI IT AMERICA CORP.

2051 Junction AVE., Suite 112 San Jose, CA 95131, USA  
Tel. +1 408 954 8920 email : sales@hyundaita.com  
www.hyundait.com

#### HYUNDAI IT EUROPE GMBH

Siemensstrasse 22, 63225 Langen, Germany  
Tel. +49(0) 6103-38878-100 email : info@hyundait.eu  
www.hyundait.eu

#### HYUNDAI IT JAPAN

Sunbridge Ogawamachi Bldg 4F, 2-2 Ogawamachi Kanda Chiyoda-Ku, Tokyo, Japan  
Tel. +81 3 5259 7645 email : oysk@hyundait.com  
www.hyundait.jp