SUF640P



FEATURES

- Ultra-thin design holds display only 0.33" (8mm) from the wall for a near-invisible application
- Universal mount compatible with ultra-thin displays with mounting patterns up to 450 x 402mm (17.73" W x 15.82" H)
- Universal brackets easily hook onto wall plate for an easy installation
- Industrial-strength Velcro[®] latching system secures display adaptors to wall plate in a single step, making installation fast and secure
- Lateral shift adjustment of up to 6" (152mm) (depending on display model) for perfect display placement
- Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- Comes with fastener pack with all necessary display attachment hardware
- Designed exclusively for use with ultrathin displays 2" (51mm) deep or less



Universal Ultra Slim Flat Wall Mount

For 37" to 50" Ultra-thin Displays*

One of the world's slimmest mounts at only 0.33" (8mm) thin, this near-invisible mount is the beauty that supports the modern style of the latest ultra-thin displays. Its all-steel, clean-line, high-gloss modeling features universal compatibility with virtually any ultra-thin display innovation. This unmatched solution delivers space-saving, ultra-sleek looks and brings the display ultra-close to the wall.

Display size: 37"-50"

LB (KG

Max load: 150lb (68kg)







Specially designed safety tabs for secure support

Easy hook-on design

Patented. Design Patent No. D679,571. Utility Panent No. 8,154,855.

CALL: 800.865.2112



Model Numbers

SUF640P:

All dimensions = inch (mm)

Universal Ultra Slim Flat Wall Mount for 37" to 50" Ultra-thin Displays

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
SUF640P	20.69" x 17.95" x .33" (526 x 456 x 8mm)	4.1lb (1.9kg)	150lb (68kg)	Scratch resistant fused epoxy	Gloss Black

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE			
SUF640P	22.375" x 2.375" x 5.25" (568 x 60 x 133mm)	4.7lb (2.2kg)	735029258353	Wall plate, universal display adaptors, mounting and display attachment hardware	1			
Accessories								

.33"

(8 mm)

SIDE VIEW

ACC215: Metal Stud Accessory Kit


NOTE: Display Compatibility Requirements

Designed exclusively for use with ultra-thin displays 2" (51mm) deep or less

The display does not require any additional heat ventilation room than 0.33" (8mm). Please refer to the manufacturer's requirements for mounting your display on the wall.

The display must have a flat mounting surface, or the mounting holes need to be on the furthest back surface of the display.

Input/Output connection must be properly orientated to accommodate mounting 0.33" (8mm) from the wall

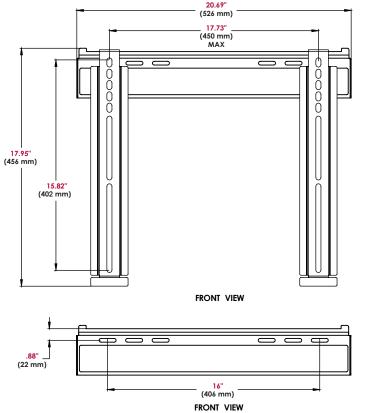

2.81" (71 mm) 1.11' (28 mm) Ð (85 Į (22 mm) 17.83" (453 mm) BRACKET DETAIL

ARCHITECTS SPECIFICATIONS

The Ultra-Thin Universal Flat Wall Mount shall be a Peerless-AV model SUF640P and shall be located where indicated on the plans. It shall be constructed of cold rolled steel and feature scratch resistant gloss black fused epoxy finish. Assembly and installation shall be done according to instructions provided.

Peerless Industries, Inc. = 2300 White Oak Circle = Aurora, IL 60502 = (800) 865-2112 = (630) 375-5100 = Fax: (800) 359-6500 = peerless-av.com

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including flat panel mounts, projector mounts, carts/stands, furniture, cables, screen cleaners and a full assortment of accessories.

