

### 3. Optional accessories

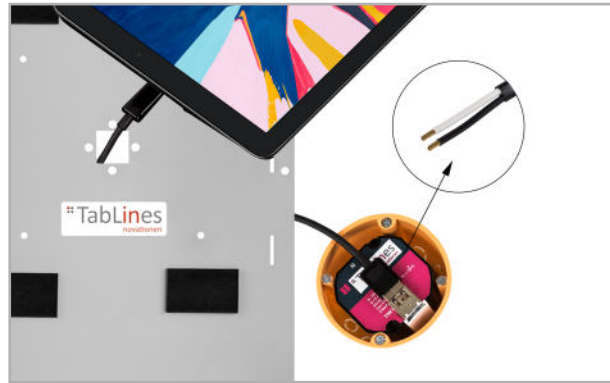


Fig. 7: Connect tablet with optional power supply unit

#### TabLines TNT001 Wall-mounted USB power supply unit

To mount your tablet in the TSG protective housing on the wall, we recommend the TabLines TNT001 power supply unit for permanent power supply.

Due to its compact form, the TabLines TNT001 can be integrated into conventional flush-mounted switch boxes (System 55). The two wires of the power supply unit (see fig. 7) can be easily connected to the power source.

Please note that the output power of the TabLines TNT001 power supply unit is 1A.

## TabLines TSG Tablet Protective Case Oak

### Assembly instructions

## TabLines TSG Tablet Protective Case Oak

### Contact us

Your TabLines dealer/specialist partner

Assembly instructions



Subject to change without notice



TabLines  
Am Marienhof 8  
22880 Wedel  
Germany


E-Mail: [info@tablines.de](mailto:info@tablines.de)  
Web: [www.tablines.de](http://www.tablines.de)  
Tel.: +49 (0) 4103 / 90387 - 0  
Fax: +49 (0) 4103 / 90387 - 11





Be sure to read the assembly instructions before assembly - installation - commissioning!  
This will protect you and prevent damage to your product.

## 1. Scope of delivery

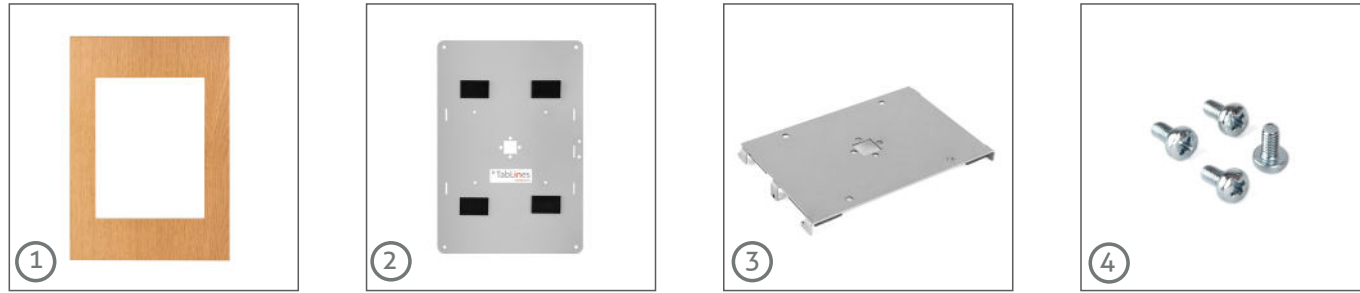

### Included in delivery:

- ① 1x Frame
- ② 1x Case
- ③ 1x Mounting plate
- ④ 4x Screws

## 2. Inserting the tablet



Fig. 1: Removing the mounting plate



Fig. 2: Loosen the screws on the housing

### 2.1 Remove the mounting plate

Slide the mounting plate downwards and lift off the plate.

### 2.2 Loosen screws

Loosen all four screws on the back of the enclosure.

Attention: The screws are needed again in step 2.5 to fix the enclosure..



Fig. 3: Remove the housing from the frame



Fig. 4: Inserting the tablet



Fig. 5: Close housing



Fig. 6: Attach the fastening plate

### 2.3 Remove the housing

Remove the housing from the frame.

Caution: The housing is needed again in step 2.5 to close the protective housing.

### 2.4 Inserting the tablet

Place the tablet between the insert strips as shown in Fig. 4 (the insert strips are supplied already glued in place).

Note that the home button of the tablet is at the bottom.

### 2.5 Close the protective housing

Place the case back on the back of the frame and tighten all four screws.

Optionally, you can attach a charging cable to the tablet and pull it through the recess provided on the back.

### 2.6 Attach the mounting plate

If desired, the mounting plate can now be attached to a bracket with a VESA standard of 100x100 mm, which can be purchased separately.

Then slide the enclosure onto the mounting plate from above.

If no further fastening is desired, this step is omitted.