

TabLines TTS Design tablet table stand

Mounting instruction



Please read the assembly instruction before installation and start-up! This will protect and prevent the product from damage.



1.	Scope of delivery.....	3
2.	General Information.....	4
3.	Insertation of the tablet.....	5
3.1	Remove rotation module.....	5
3.2	Open the housing.....	5
3.3	Lay cable.....	5
3.4	Insert tablet.....	6
3.5	Close the housing.....	6
3.6	Screw the rotation module.....	6

Congratulations!

The TabLines TTS Design tablet table stand is a high-quality product. It will offer you great benefits in terms of comfort and design at a high technical level.

The usability and lifespan of the TabLines TTS Design tablet table stand depends on the correct and professional installation, operation, maintenance and compliance of this assembly instruction. Electrical connections to this product should be made only by qualified specialists.

1. Scope of delivery

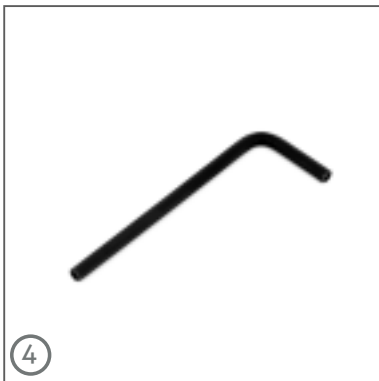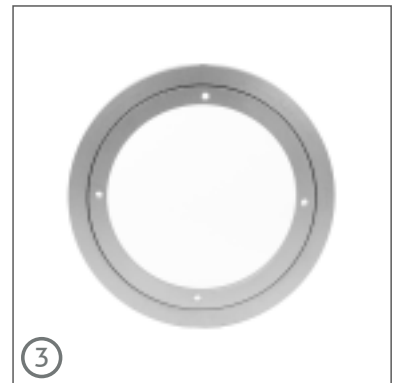

Included:

- ① 1x Upper part housing
- ② 1x Bottom part housing
- ③ 1x Rotation module (only included at TTS with rotation module)
- ④ 1x Safety allen wrench 3 mm
- ⑤ 4x Screw M5
- ⑥ 6x Safety screw M5

2. General Information

For a professional assembly, please observe the following instructions before installation.

1. Use the TabLines TTS Design tablet table stand only on dry, solid and even surfaces.
2. You can charge your tablet in the TTS Design tablet table stand. A charging cable can be put through the hole in the bottom of the housing. A charging cable is not included. Some Samsung models require the additional use of an angle plug.
3. TabLines TTS tablet table stands are available for all common tablet models. Please make sure, that you purchased the right TTS for your tablet.
4. The TTS tablet mount can be produced for all available tablets on the market (e.g. Apple, Samsung, Microsoft, Amazon Fire etc.) The mounting instruction is the same for all tablet moduls.
5. If you have chosen a model without rotation module, you can skip step 3.1 and 3.6.

Drawing TTS Design Tablet Stand

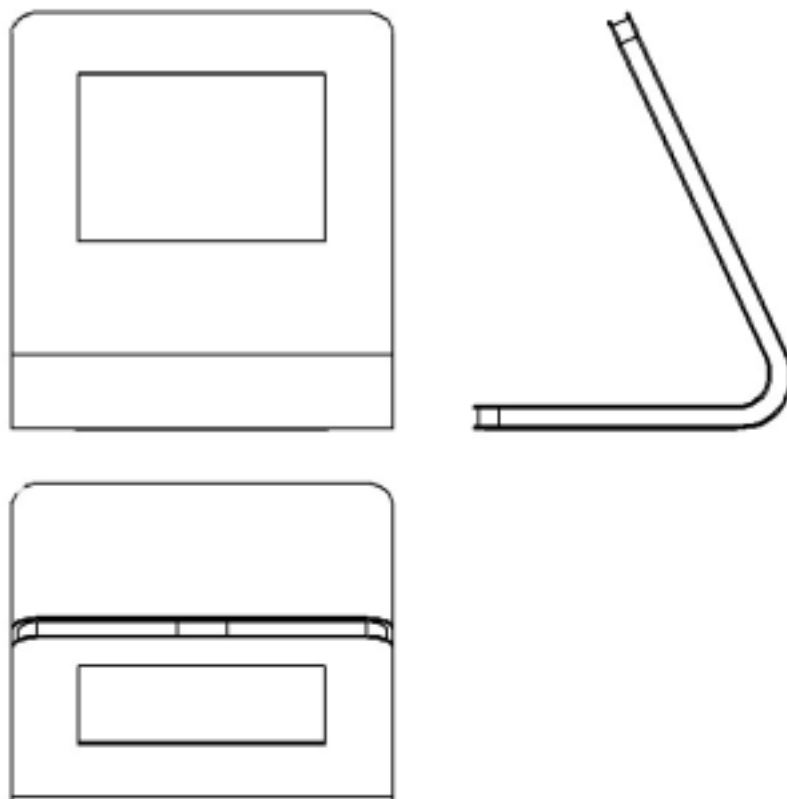


Fig. 1: TabLines TTS Design table stand

3. Insertation of the tablet

The TabLines TTS is a robust and functional table stand for your tablet. The solid steel construction protects the tablet against unauthorised access and can be used in public areas.



Fig. 2: Remove the rotation module

3.1 Remove rotation module

If you have a model without rotation module, please skip this step.

For an easier installation, place the TTS on a smooth/ clean surfaces as shown in fig. 2.

Remove the four screws of the inner ring on the rotation module with the included allen wrench. Now you can remove the rotation module from the stand.



Fig. 3: Open the housing

3.2 Open the housing

Remove the six screws on the backside of the stand with the allen wrench.

Please note: Because of the special security screws no other allen wrench can be used. This guarantees a safe use of the tablet mount and protects it against unauthorized access.



Fig. 4: Lay cable

3.3 Lay cable

Place the unscrewed housing onto its front. Ensure that the surface will not be scratched (clean surface, etc).

Pass the cable through the lower cut-out.

Attention: Charging cable and power supply are not included and have to be purchased separately.



Fig. 5: Insertation of the tablet

3.4 Insert tablet

Attention: After installation the power button and other buttons like the volume control, etc. are not longer accessible. Start the desired application before you close the housing finally.

Place the tablet between the foam strips with the display facing down. The foam strips are used for fixation and are already glued.

Make sure that the tablet is fixed between the strips and connect the charging cable.



Fig. 6: Assembly of the housing bottom

3.5 Close the housing

Place the bottom of the housing back onto the top of the housing and tighten the upper four screws.

Then tighten the remaining two screws to the lower part of the housing. Make sure that all screws are tight.




Fig. 7: Screw the rotation module

3.6 Screw the rotation module

Fix the rotation module with the four screws which have been removed before (see fig. 3.1). Screw the module into the provided recess on the housing base. Make sure that you run the cable through the rotation module.

Now the TabLines TTS Design tablet table stand can be used. If you have a model without rotation module this step is unnecessary.


Notes

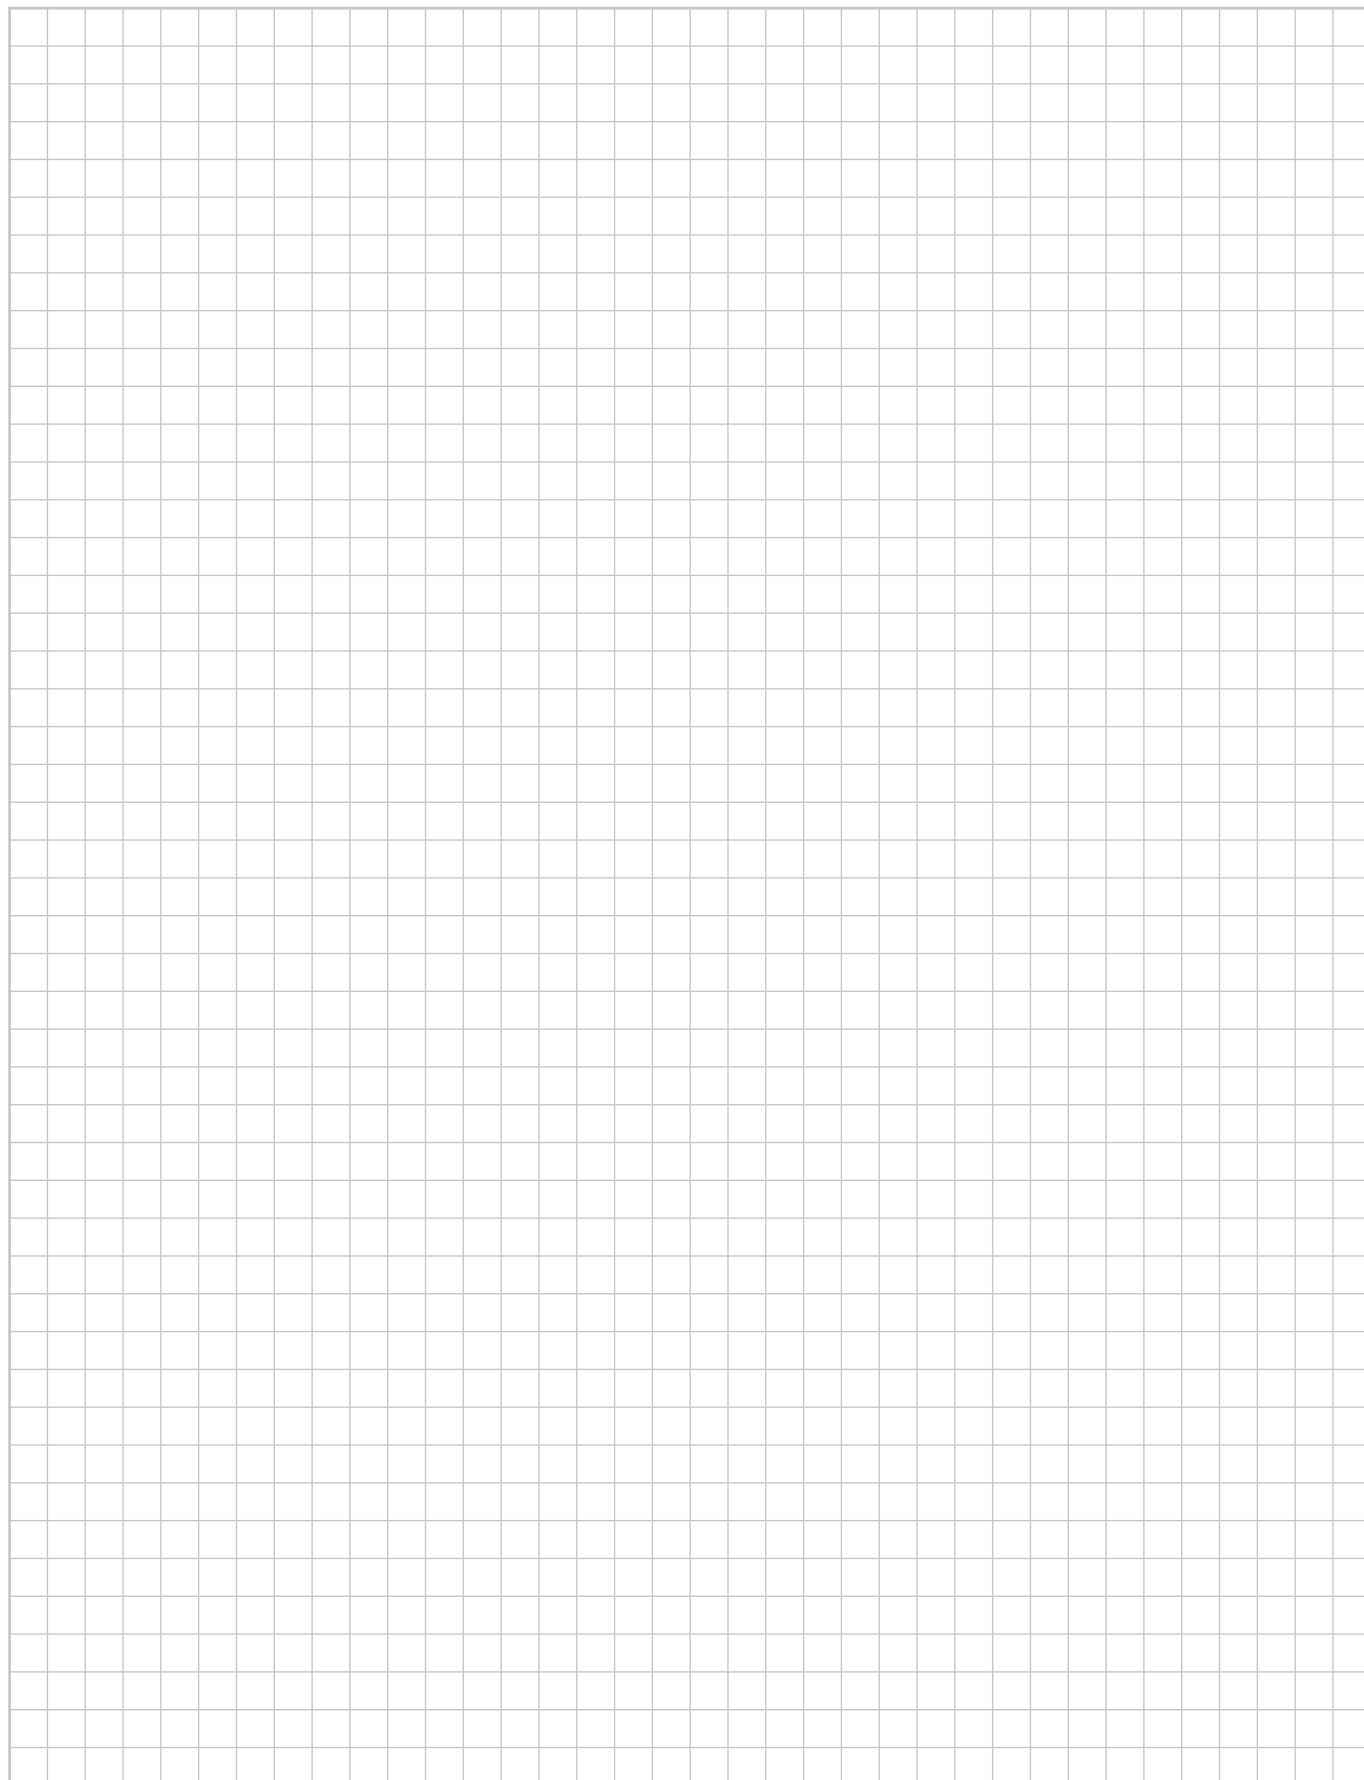

TabLines TTS Design tablet table stand

Contact us

Your TabLines dealer/ specialist partner



Changes reserved



TabLines
Am Marienhof 8
22880 Wedel
Germany

E-Mail: info@tablines.com
Web: www.tablines.com
Phone: +49 (0) 4103 / 90387 - 0
Fax: +49 (0) 4103 / 90387 - 11

 **TabLines**
novationen